

# 5G40Nd/N

LOW & MID FREQUENCY TRANSDUCER
G40 Series

### **KEY FEATURES**

- Program power: 200 W
- Sensitivity: 92 dB (1W / 1m)
- 1,5" aluminum voice coil
- Shorting cap for extended response and low harmonic distortion
- FEA optimized neodymium magnetic circuit
- Extended controlled displacement: X<sub>max</sub> ± 3 mm
- 20 mm peak-to-peak excursion before damage
- Designed for mid-bass applications
- Optimized for line array systems





## **TECHNICAL SPECIFICATIONS**

Nominal diameter	125 mm 5 in
Rated impedance	8 Ω
Minimum impedance	6,9 Ω
Power capacity*	100 W <sub>AES</sub>
Program power	200 W
Sensitivity	92 dB 1W / 1m @ Z <sub>N</sub>
Frequency range	150 - 17.000 Hz
Recom. enclosure vol.	10 / 20 I 0,35 / 0,7 ft <sup>3</sup>
Voice coil diameter	38,1 mm 1,5 in
BI factor	10 N/A
Moving mass	0,009 kg
Voice coil length	9 mm
Air gap height	7 mm
X <sub>damage</sub> (peak to peak)	20 mm

## THIELE-SMALL PARAMETERS\*\*

Resonant frequency, f <sub>s</sub>	140 Hz
D.C. Voice coil resistance, R <sub>e</sub>	6,6 Ω
Mechanical Quality Factor, Q <sub>ms</sub>	2,8
Electrical Quality Factor, Qes	0,53
Total Quality Factor, Qts	0,45
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	1,4 I
Mechanical Compliance, C <sub>ms</sub>	143 $\mu$ m / N
Mechanical Resistance, R <sub>ms</sub>	2,9 kg / s
Efficiency, $\eta_0$	0,7 %
Effective Surface Area, S <sub>d</sub>	$0,0085 \text{ m}^2$
Maximum Displacement, X <sub>max</sub> ***	3 mm
Displacement Volume, V <sub>d</sub>	26 cm <sup>3</sup>
Voice Coil Inductance, Le @ 1 kHz	0,2 mH

#### Notes

<sup>\*</sup> The power capaticty is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.


<sup>\*\*</sup> T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

<sup>\*\*\*</sup> The  $X_{max}$  is calculated as  $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$ , where  $L_{vc}$  is the voice coil length and  $H_{ag}$  is the air gap height.



# 5G40Nd/N

LOW & MID FREQUENCY TRANSDUCER
G40 Series

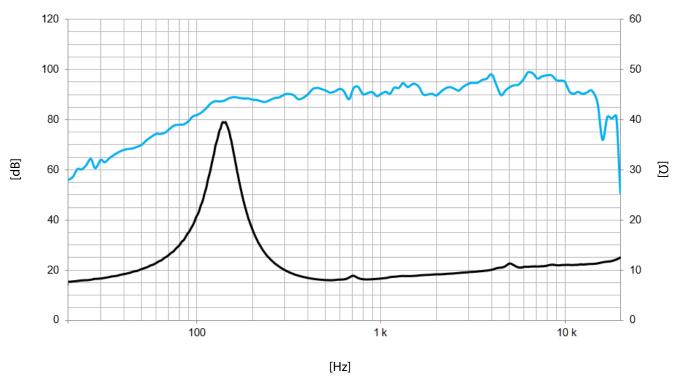

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

## **MOUNTING INFORMATION**

Overall diameter	155 mm	6,1 in
Bolt circle diameter	141,5 mm	5,6 in
Baffle cutout diameter:		
- Front mount	120 mm	4,7 in
Depth	72 mm	2,8 in
Volume displaced by driver	0,5 I	0,02 ft <sup>3</sup>
Net weight	1,2 kg	2,6 lb
Shipping weight	1,3 kg	2,9 lb

## **DIMENSION DRAWING**

