

KEY FEATURES



- High power handling: 600 W program power
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 96 dB (1W / 1m)
- FEA optimized neodymium magnetic circuit
- Optimized linear behaviour
- Weatherproof cone with treatment for both sides
- 2" copper voice coil
- Aluminium demodulating ring
- Extended controlled displacement: $X_{max} \pm 6$ mm
- 35 mm peak-to-peak excursion before damage
- Optimized for 2 or 3 way PA systems and line array for ultimate professional applications



TECHNICAL SPECIFICATIONS

Nominal diameter	200 mm	8 in
Rated impedance		8 Ω
Minimum impedance		7,5 Ω
Power capacity*	300 W _{AES}	
Program power	600 W	
Sensitivity	96 dB	1W / 1m @ Z _N
Frequency range	80 - 4.000 Hz	
Voice coil diameter	50,8 mm	2 in
BI factor		16 N/A
Moving mass	0,025 kg	
Voice coil length	15 mm	
Air gap height	7 mm	
X _{damage} (peak to peak)	35 mm	


THIELE-SMALL PARAMETERS**

Resonant frequency, f _s	76 Hz
D.C. Voice coil resistance, R _e	6,2 Ω
Mechanical Quality Factor, Q _{ms}	6,2
Electrical Quality Factor, Q _{es}	0,29
Total Quality Factor, Q _{ts}	0,28
Equivalent Air Volume to C _{ms} , V _{as}	11,6 l
Mechanical Compliance, C _{ms}	171 μ m / N
Mechanical Resistance, R _{ms}	2 kg / s
Efficiency, η_0	1,7 %
Effective Surface Area, S _d	0,022 m ²
Maximum Displacement, X _{max} ***	6 mm
Displacement Volume, V _d	132 cm ³
Voice Coil Inductance, L _e @ 1 kHz	0,5 mH

Notes:
* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

** T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

*** The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

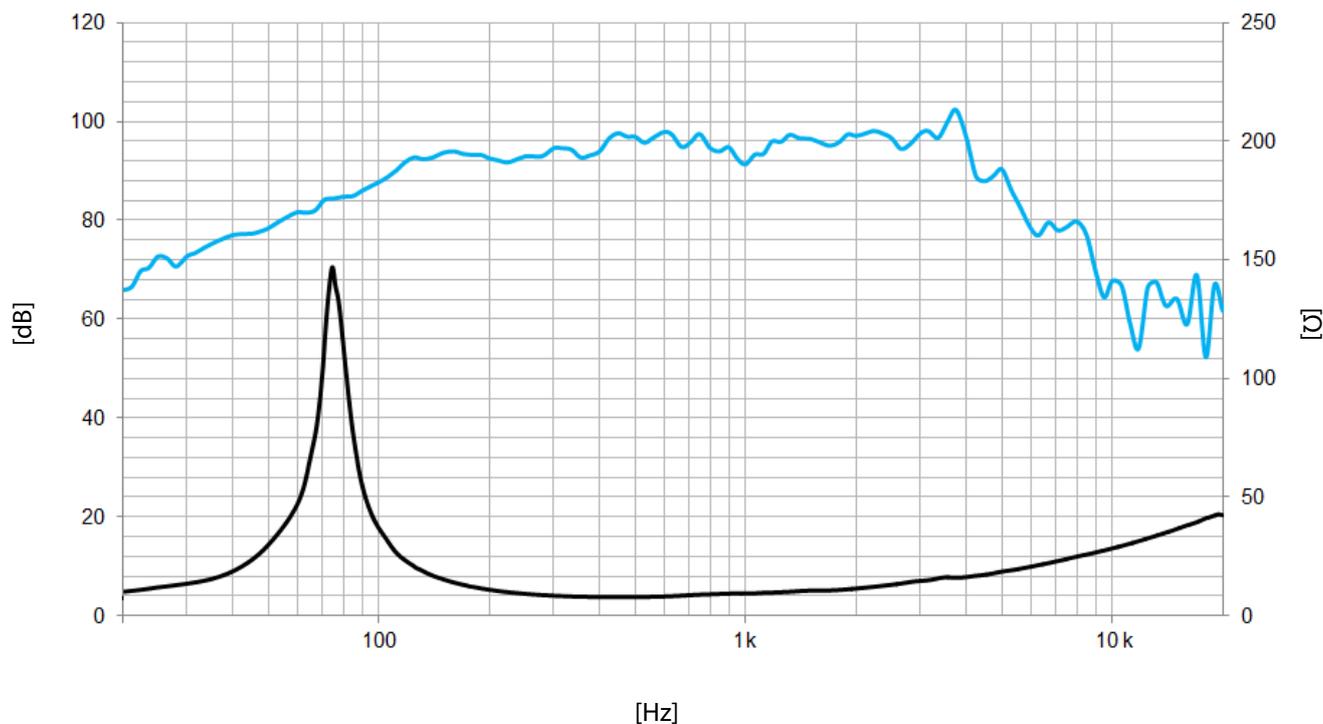

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	212 mm	8,34 in
Bolt circle diameter	195 mm	7,68 in
Baffle cutout diameter:		
- Front mount	182 mm	7,16 in
Depth	97 mm	3,8 in
Net weight	1,9 kg	4,2 lb
Shipping weight	2,2 kg	4,9 lb

DIMENSION DRAWING

